

AUSTRALIAN DISTRIBUTOR



M-SERIES TRAILER MOUNT

STANDARD



LED Lighting



Lowest Height
Largest Door



Torsion Axels



Performance Tank
Design

The reputation of the MAGMA for simple, safe and sustainable operation lives on with the M-Series which marks a new chapter for Cimline™ with signature safety green paint.

Going green means more than a paint color change as the M-Series comes standard with lower emissions, lower fuel consumption and quieter operation for a better work environment. M-Series most popular features being a low-profile design, high production and easy to use operator features continue to make Cimline™ the leader in crack sealing.

Ergonomic Simplicity: M-Series offers the highest levels of operator comfort with a completely redesigned delivery system. The no-stress boom swivels around the heated sealing hose, unlike any other machine, minimizing hose stress and providing the industry-leading operating range. Add the new heated wand option for even better comfort and ease of use.

Community and Operation Friendly: The clean Tier IV compliant diesel engine runs at lowest possible RPM for the best combination of performance and fuel economy. The standard noise abatement muffler, when combined with the engine cover option, reduces noise levels up to 40% when compared to other models.

M SERIES FAMILY

M-Series
Skid-Mount



M2 With Pump



M1 With Pump




M4 Dual Hose,
Dual Pump and Conveyor



M-SERIES TRAILER MOUNT

AUSTRALIAN DISTRIBUTOR

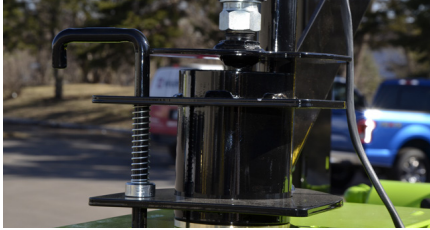

Stress Free Boom Rotates Around Hose



Electric Heated Wand Option



Optional Heated Draw-Off Option



Optional Engine Cover



Optional Rotary Screw Air Compressor



Simple Seal Controller

SPECIFICATIONS

	M1**	M2**	M4
Material Capacity gal. (litres)	150 (568)	230 (871)	410 (1,552)
Engine HP	25 Diesel 40 Compressor Model	25 Diesel 40 Compressor Model	25 Diesel 40 Compressor Model
Heating Method	Diesel	Diesel	Diesel
Heat Rating BTUs	250,000	290,000	400,000
Material Pump GPM (LPM)	20 (76)	20 (76)	20 (76)
GVWR lbs. (kg)	5,200 (2,359)	6,840 (3,103)	9,520 (4,318)
GAWR lbs. (kg)	7,000 (3,175)	7,000 (3,175)	10,000 (4,536)
Axles / Suspension	1 (Torsion Type)	1 (Torsion Type)	1 (Torsion Type)
Brake Type	Electric*	Electric*	Electric*
Loading Height in. (mm)	50 (1,270)	48 (1,219)	54 (1,372)
Loading Doors	Single Curbside	Dual	Dual
Fuel Capacity gal. (litres)	33 (125)	33 (125)	33 (125)
Hydraulic Capacity gal. (litres)	33 (125)	33 (125)	33 (125)
Heat Transfer Oil gal. (litres)	22 (83)	30 (114)	40 (151)
Dimensions L x W x H in	152 x 82 x 93	170 x 79 x 92	185 x 90 x 90
Dimensions L x W x H (mm)	3,692 x 2,083 x 2,362	4,318 x 2,007 x 2,3336	4,699 x 2,286 x 2,286
Shipping Weight lbs. (kg)	4,200 (1,905)	4,750 (2,155)	6,000 (2,721)
Warranty		One Year Bumper to Bumper	

Due to Continuous Improvements, Specifications are Subject to Change without Notice

* Available with Surge Brakes
** Available without Pump

56 Overlord Place
Acacia Ridge QLD 4110
Brisbane Australia
PO Box 1200
Archerfield QLD 4108 Australia
Ph + 61 7 3216 7058
E: info@ausroad.com.au
ausroad.com.au

Contact:
Matthew Sims,
National Sales Manager
M: + 61 408 650 686
E: sales04@ausroad.com.au

Doc#: I-60 | 23.10.2025 | Original